


Trench drain UCH 1

61 Uherský Ostroh

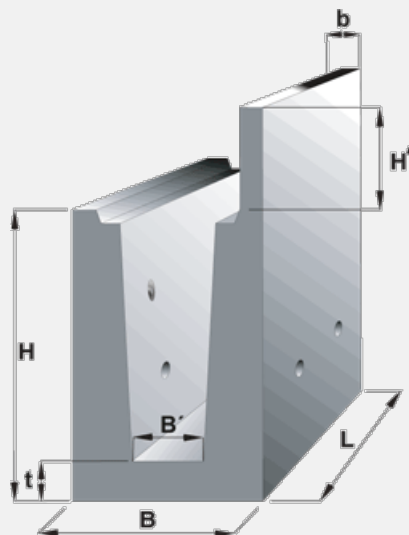

| Trademark | Dimensions (cm) | | | | | | | Concrete Class | Volume (m3) | Weight (kg) |
|------------|-----------------|----|-----|-----|-----|-----|-----|----------------|-------------|-------------|
| | L | B | H | H_1 | B_1 | B_2 | T_2 | | | |
| TZM 234-19 | 249 | 87 | 145 | 50 | 40 | 20 | 20 | C30/37-XF3 | 1,9545 | 4820 |

Usage:

For building cunette channels at railway tracks or other roads. The trench drains UCB are in form of letter U and the trench drains UCH are in form angular of letter J. The drains have 4 draining holes with nominal inside diameter 100 mm and gradient 5% inwards in lower part. For covering of drains there are intended the covers UC, whereas three covers or the covers UC-a are needed for one drain, whereas for one drain five covers are needed. The drains are made either with manipulation hooks or with clips DEHA.