


Custom manufacturing of noise protection panel PHS 2

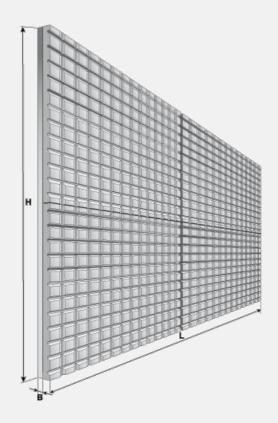

Trademark	Dimensions (cm)			Concrete Class
	L	В	н	Concrete class
IZX 502/19	395, 595	11	50-280	C 30/37-XF4

Usage:

Sound protection panel PHS 2 is an iron-concrete bearing reflectance panel. One side of the panel is pasted with absorptive shaped pieces made of recycled rubber.

The different structure of rubber granulate, abrading, polyutherane binder, dye and other ingredients enables to get noise absorptivity in

Absorptive shaped piece is a product made of granulated rubber, rectangular design. It is produced in 6 basic colour tints (black, grey, brown, red, green, blue).

The depth of colour can be modified on customer"s demand. Colour palette can be enhanced through spraying appropriate colours. These plates are distinguished by long lifetime and the ability to retain the same properties in long-run even under adverse climate

In case of damage the used plates can be fully recycled. Most of sound protection pieces is treated (pasted) in the production plant. Corner blocks are pasted on a mounted sound protection panel in PHS after the piece is accurately cut. Handling is made through transport fixtures with a ball.